

SCR-760 CCD-Barcodelese- scanner von RECOTEC®

Features

COMPATIBILITY

Supports a wide range of systems - Microcomputers, PS/2s, PCATs and compatibles, Mainframes, Electronic Cash Registers, Handy Terminals and POS systems.

CONNECTIVITY

Provides integrated RS232 and K/B interface for more connectivity options reducing inventory headaches.

DURABILITY

Portable for rough working environment. It can withstand drop tests of one meter thus ensuring longer life.

MODULARITY

The scanner and its cable is detachable giving you the flexibility and convenience to maintain this product.

CUSTOMIZED

The scanner can be modified according to your own design specification. We can even provide design specifications according to your needs.

ERGONOMIC DESIGN

The scanner is not only pleasing to look at but is also lightweight to prevent finger fatigue.

MARKET-ORIENTED

Among the CCD scanners available in the market today, the 60mm-aperture scanner is the most

widely-used. We provide a 75 mm aperture to support not only the 60 mm market but also the 80 mm market with the scanner's 15 mm depth-of-field.

COST-EFFECTIVE

This scanner is one of the most economical products in the industry. Add all its other features - Connectivity, Durability, Modularity and Market-Oriented you have an unbeatable product.



SCR-760 CCD-Barcodelese- scanner von RECOTEK®

**Einmal mehr eine
führende Barcode-
lösung von stethos**

RECOTEK SCR-760 - Technische Daten

BAR CODE

Readable Bar Codes UPC/EAN/JAN, Code 39, Full ASCII Code 39, Codabar, ITF 25, Code 128, Code 93, MSI/Plessey ...
Depth of Field 0-15 mm (0.6 inch)
Width of Window 75 mm (3 inch)
PCS Value 0.45 min.

ELECTRICAL

Power Supply DC 5V ± 0.25V
Power Requirement 160 mA
Reading Indicator Beeper & Red LED

OPTICAL

Light Source Red LED 660 nm
Photo Sensor 2048 Pixel CCD
Resolution 0.127 mm (5 MIL)
Scan Speed 33 Scans Per Second
Reading Angle Forward 10 Degree, Reverse 25 Degree, Left & Right 30 Degree
Curvature of Code R = 30 mm (Ref. EA-N 13, PCS 0.9)

PHYSICAL

Body Material ABS
Cable 1.5 Meter, Straight
Weight 138g Without Cord

ENVIRONMENTAL

Temperature Operation 0° to 50° C, Storage -10° to 60° C
Humidity Operation 20% to 80% RH, Storage 10% to 90% RH
Ambient Light Rej. 1500 Lux


DURABILITY

Shock Resistance 1 Meter Drop Onto Concrete Surface
Cable 100,000 Bending at 90 Degree with 500g Weight
Trigger Switch 1 Million Actuations

SALES AND SUPPORT

stethos Systemhaus GmbH
Weimarer Str. 48
D-71065 Sindelfingen
Telefon: [+ 49] (0)7031/86091-0
Telefax: [+ 49] (0)7031/871444
eMail: info@stethos.com
WWW: http://www.stethos.com

DIMENSIONS

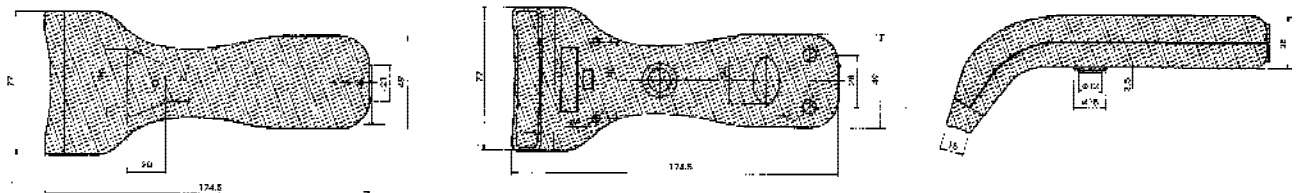

DUST PROOF COVER



TRIGGER



PLUG IN CONNECTION



Technische Änderungen vorbehalten

© 1999 stethos Systemhaus GmbH
Gedruckt in Deutschland 2/99